



**Economical Suspension System
With Lasting Performance**

Model S3A

S3A is an economical system for use with light weighted tiles. It offers maximum design simplicity and easy plenum access.

Features:

- ⊕ 38mm x 24mm main runners - ensure sufficient strength and minimise the need for wires, clips or fasteners.
- ⊕ Galvanised steel – ensures maximum corrosion protection.
- ⊕ Shock-proof locking joints.
- ⊕ Largest selection of components.
- ⊕ Standard White color - perfectly matches most mineral and metal ceilings.
- ⊕ Easy assembly – requires no particular skills.
- ⊕ Heavy duty products available upon request.

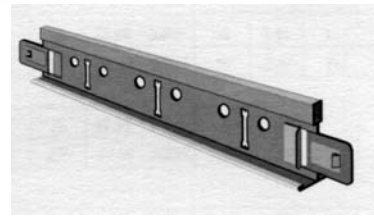

Order Guide

Part No.	Description	Length	Packing
----------	-------------	--------	---------

Metric module

80105	Main Tee	3600mm	25pcs/ctn
80108	Main Tee	3000mm	25pcs/ctn
80106	Cross Tee	1200mm	50pcs/ctn
80107	Cross Tee	600mm	75pcs/ctn

Imperial module


80101	Main Tee	12 feet	25pcs/ctn
80109	Main Tee	10 feet	25pcs/ctn
80102	Cross Tee	4 feet	50pcs/ctn
80103	Cross Tee	2 feet	75pcs/ctn

500x500 module

50101	Main Tee	3000mm	25pcs/ctn
50102	Cross Tee	1500mm	50pcs/ctn
50103	Cross Tee	500mm	75pcs/ctn

Accessories

80104	A24 Wall Angle	3000mm	40pcs/ctn
-------	----------------	--------	-----------

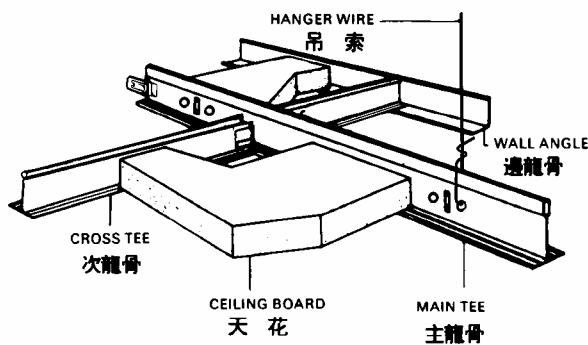

SUSPENDED EXPOSED CEILING GRIDS

Installation:

- Step 1** Measure area, check ceiling plans, height and level. Determine centre lines and balance ceiling layout.
- Step 2** Install wall angles on walls at 450mm centres.
- Step 3** Determine position of main tees and install ceiling anchors at 1200mm centres. Fasten hanger wires to anchors and drop hanger wires vertically.
- Step 4** Install main tees by hanger wires. Check main tees with ceiling level.
- Step 5** Install cross tees by inserting the joints to the slots of main tees and cross tees. Measure and cut perimeter cross tees.
- Step 6** Install acoustic ceiling panels.